


Surface

Species<sup>1</sup> or Product

Not Coated

UNCOATED  
NORTHERN BOX

80mm Cover x 19mm Thick SOLID WOOD  
FLOORING

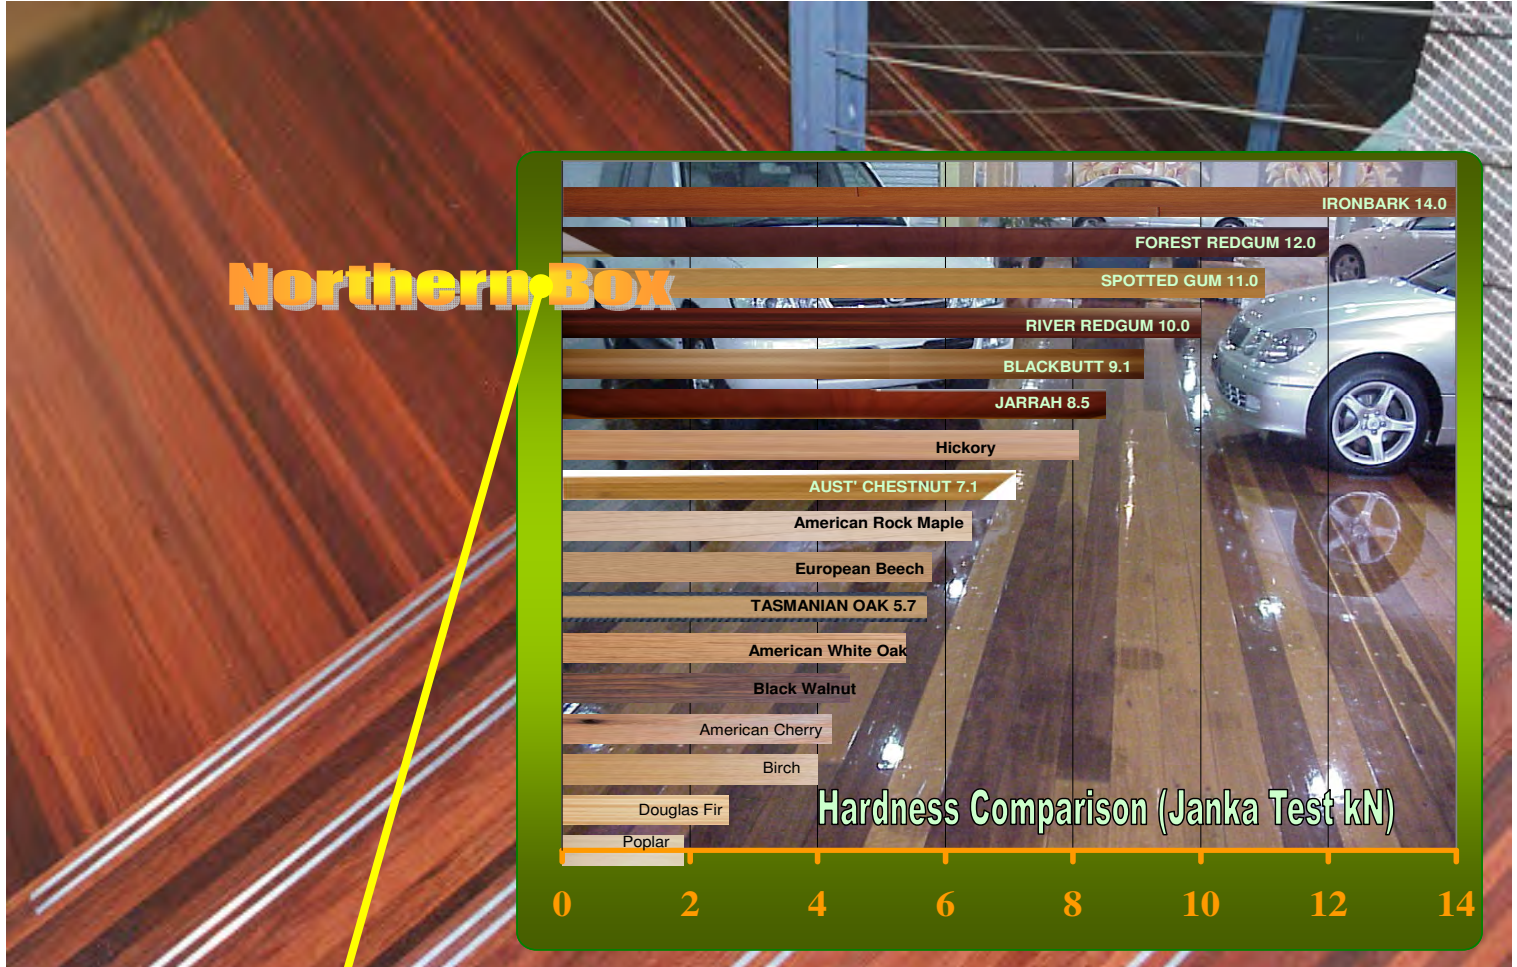

Hardness (Janka Test)	11kN
Wide/Cover (mm)	80
Lengths <sup>[2]</sup> (mm)	2700
Thickness (mm)	19
Packed <sup>[4]</sup>	8 pieces high x 1 wide
Grade	Select
Scientific Name <sup>[1]</sup>	Tristania Species

Information provided is based on sample test averages and there will be variation from piece to piece.

Density	1000 kg/m <sup>3</sup>
Amount per Unit/Box <sup>[4]</sup>	1.73 Square Metres
Formaldehyde Emission	'E0'(no emission)
Coating Gloss Level	NA
Coating	Uncoated
Coating Wear Resistance <sup>[3]</sup>	
Moisture Content	6% to 10%

Suitable for relative humidity from 30% to 60%. See our document "[Moisture Management](#)" for more information.

**FIRE RESISTANCE DATA:** For **critical design** information see our document "[FIRE HAZARD REQUIREMENTS FOR TIMBER FLOORING](#)"

CRITICAL RADIANT FLUX Greater than 4.5kW/m2

Smoke Development Rate less than 750%-min

<sup>[1]</sup> Species of recycled/waste recovery grade may include a range & are identified based on appearance and properties – See our document "[Sources of Wood](#)" for more information.

<sup>[2]</sup> Lengths usually made up to 2100mm. Some combinations of lengths made up to as short as 1800mm are occasionally supplied.

<sup>[3]</sup> Taber Test – See our document "[Floor Life](#)" for more information.

<sup>[4]</sup> Sometimes square metres will vary to utilise all lengths. If you need exactly the indicated square metres please check with us.